


St. George, UT

| Building System | Cost | Relative Cost |
|-------------------------------------------------|------------------------|----------------------|
| CONVENTIONAL WOOD FRAMING SINGLE BEDROOM SCHEME | \$ 9,223,891.00 | 100 |
| 3 STORY ONLY | \$ 7,076,963.00 | |
| CONVENTIONAL WOOD FRAMING MIXED BEDROOM SCHEME | \$ 9,882,196.00 | 100 |
| 3 STORY ONLY | \$ 7,575,179.00 | |
| LIGHT GAGE STEEL FRAMING SINGLE BEDROOM SCHEME | \$ 9,975,629.00 | 108 |
| LIGHT GAGE STEEL FRAMING MIXED BEDROOM SCHEME | \$ 10,128,218.00 | 102 |
| MASONRY & PRECAST SINGLE BEDROOM SCHEME | \$ 9,897,852.00 | 107 |
| MASONRY & PRECAST MIXED BEDROOM SCHEME | \$ 10,091,742.00 | 102 |
| FORM IN PLACE CONCRETE FLOOR ALTERNATE (SINGLE) | \$ 10,535,405.00 | 114 |
| FORM IN PLACE CONCRETE FLOOR ALTERNATE (MIXED) | \$ 10,702,250.00 | 108 |
| PRECAST CONSTRUCTION SINGLE BEDROOM SCHEME | \$ 11,172,626.00 | 121 |
| PRECAST CONSTRUCTION MIXED BEDROOM SCHEME | \$ 11,283,952.00 | 114 |
| ICF WALLS & PRECAST PLANK SINGLE BEDROOM SCHEME | \$ 10,142,701.00 | 110 |
| ICF WALLS & PRECAST PLANK MIXED BEDROOM SCHEME | \$ 10,293,127.00 | 104 |
| FORM IN PLACE CONCRETE FLOOR ALTERNATE (SINGLE) | \$ 10,827,466.00 | 117 |
| FORM IN PLACE CONCRETE FLOOR ALTERNATE (MIXED) | \$ 10,948,694.00 | 111 |
| INTERIOR CMU WALLS ALTERNATE (SINGLE) | \$ 10,069,886.00 | 109 |
| INTERIOR CMU WALLS ALTERNATE (MIXED) | \$ 10,218,096.00 | 103 |

Saint George, Utah Single Bedroom

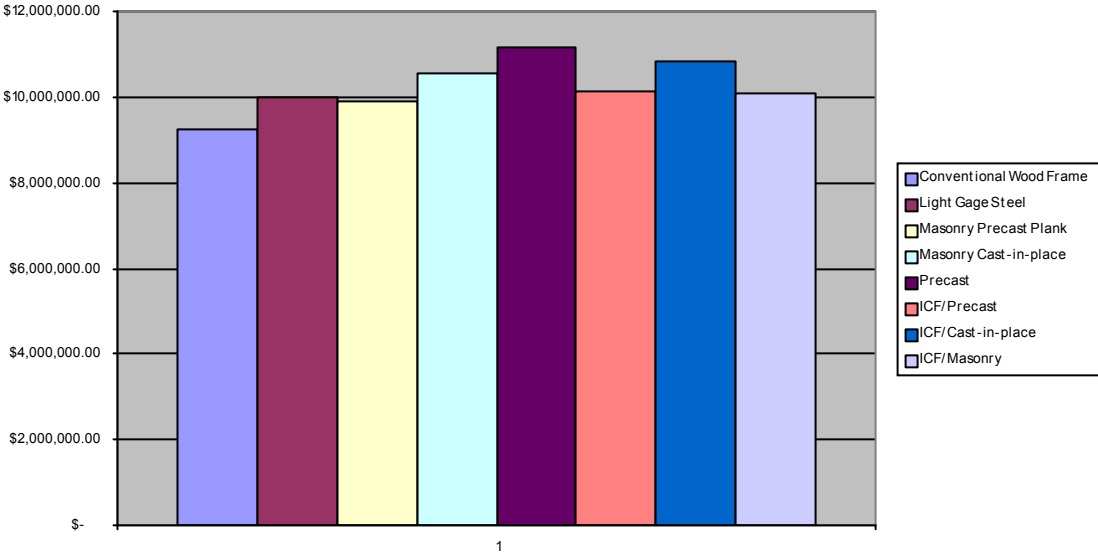

Saint George, Utah Mixed Bedroom

